

NAS XM-19 (UNS S20910)

NAS High Strength, High Corrosion Resistance Stainless Steel

NAS XM-19 is a nitrogen-strengthened austenitic stainless steel with excellent corrosion resistance. In comparison with Type 316L, NAS XM-19 provides higher corrosion resistance and higher strength. Nippon Yakin supplies this product in plate, sheet and strip forms.

Steel Grade/Standard

NAS	JIS	ASTM A240
NAS XM-19	—	UNS S20910

Chemical Composition

	C	Si	Mn	P	S	Ni	Cr	Mo	Nb	V	N
Specification (UNS S20910)	≤0.06	≤0.75	4.0~6.0	≤0.040	≤0.030	11.5~13.5	20.5~23.5	1.50~3.00	0.10~0.30	0.10~0.30	0.20~0.40

Physical Properties

Density	[g/cm ³]	7.88	
Specific heat	[J/kg · K]	487	
Electrical resistivity	[μΩ · cm]	81	
Thermal conductivity	[W/m · K]	13.2	
Average coefficient of thermal expansion	[10 ⁻⁶ /°C]	24~100°C	15.8
		24~200°C	16.4
		24~300°C	16.9
		24~400°C	17.3
Young's modulus	[MPa]	19.8 × 10 ⁴	
Magnetism		None	
Melting range	[°C]	1380~1406	


Mechanical Properties

Mechanical Properties at Room Temperature

			0.2% proof stress [MPa]	Tensile strength [MPa]	Elongation [%]	Hardness [HB]
Specification: Hot-rolled sheet (UNS S20910)			≥ 380	≥ 690	≥ 35	≤ 241
Example	Hot-rolled sheet	7mm ^t	460	805	41	219


			0.2% proof stress [MPa]	Tensile strength [MPa]	Elongation [%]	Hardness [HRB]
Specification: Cold-rolled sheet (UNS S20910)			≥ 415	≥ 725	≥ 30	≤ 100
Example	Cold-rolled sheet	0.8mm ^t	527	856	36	97

Work Hardening

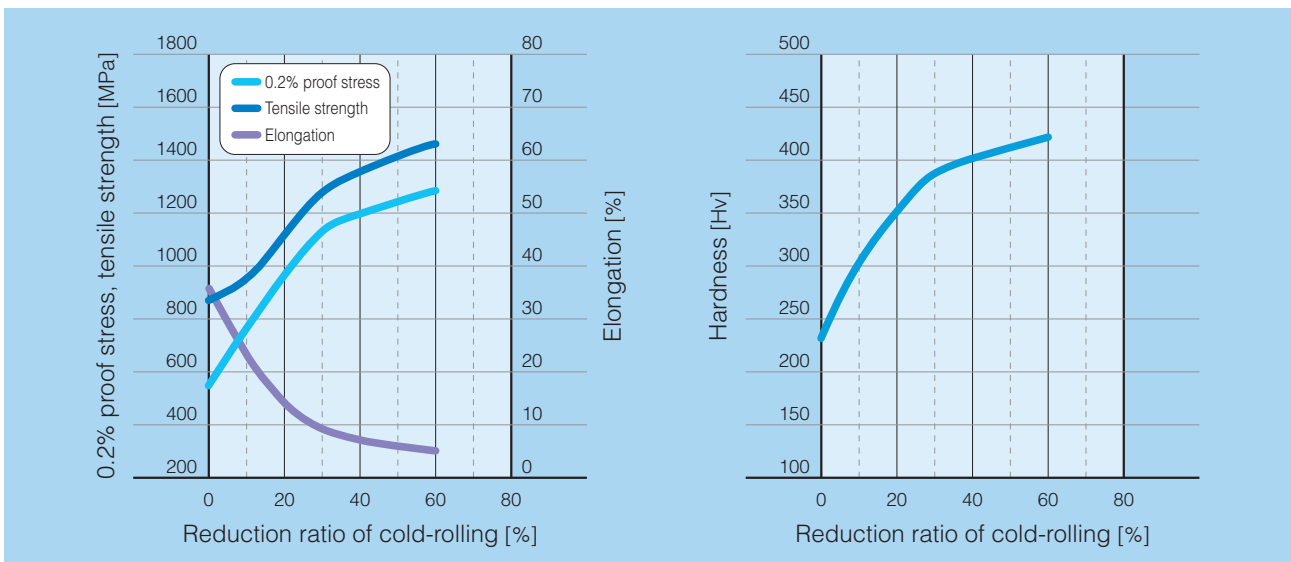

Corrosion Resistance

NAS XM-19 possesses higher corrosion resistance than Type 316L.

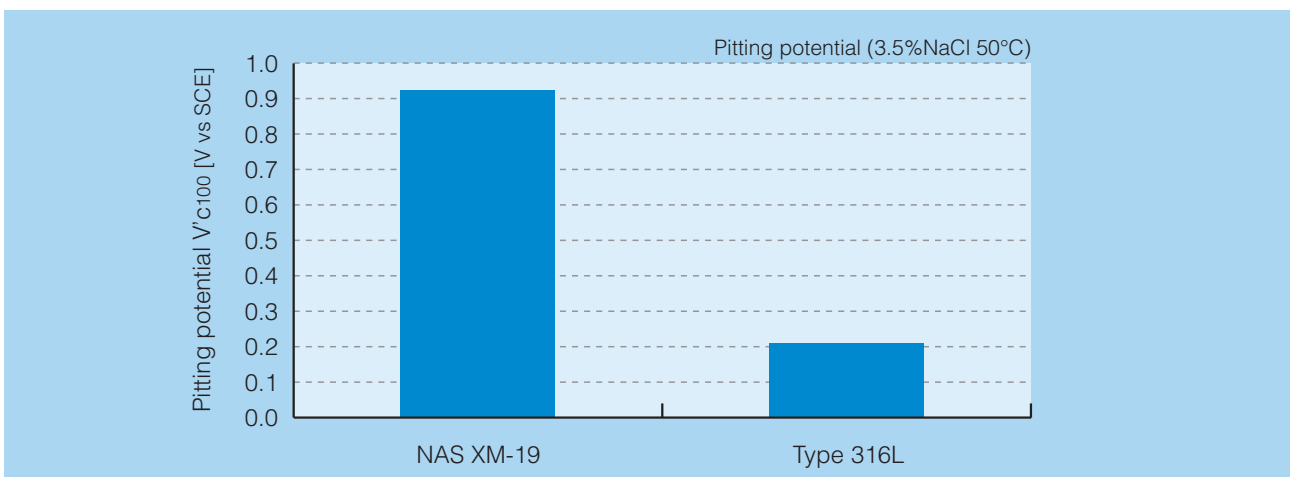

Workability

Hot and cold workability are substantially the same as other austenitic stainless steels. However, in both hot working and cold working, the fact that this is a high strength material must be considered.

Weldability

Welding is possible by TIG, MIG, and shielded metal arc welding in the same manner as with standard austenitic stainless steels. ER209 welding rods, which have the same composition, are frequently used.

Heat Treatment

Solution annealing of NAS XM-19 is normally performed at the temperature range from 1065 to 1120°C followed by being quenched in water or rapidly cooled by other means.

Pickling

A mixture of nitric acid and fluoric acid is used in pickling. However, because descaling is somewhat difficult in comparison with Type 304, alkali immersion before acid pickling, and if possible, shot blasting are extremely effective.

Applications

Chemical plants, spent nuclear fuel containers (casks), heat exchanger components, pumps, structural components

For more information, please contact:
Nippon Yakin Kogyo Co., Ltd.
Material Solutions Sales Department
San-Ei Bldg., 5-8, 1-chome Kyobashi, Chuo-ku,
Tokyo 104-8365 Japan
TEL: +81-3-3273-4649 FAX: +81-3-3273-4642
E-Mail: inquiry@nyk.jp
URL: <http://www.nyk.co.jp/en/>

Note regarding the handling of property data:

The technical information contained in this product guide is representative values obtained in property tests and other items used to explain the performance of the product. With the exception of items specifically mentioned as provisions of a "Standard," the contents do not represent guaranteed upper limit or lower limit values. The respective data given on this technical information are typical examples and may be different in some cases from the data obtained from the actual product. No responsibility shall, therefore, be assumed for damages arising from using the technical information data. This information is also subject to change in the future without notice. To obtain the most recent information, please contact Nippon Yakin.